



SF-B140 Series


ANSI
ASME B18.3
ASTM F835~

STAINLESS STEEL 18-8

Rockwell B55~




RoHS Directive Compliance



SOCKET BUTTON SCREW INCH (UNC THREAD)

STAINLESS STEEL 18-8 (B55~ RATED)

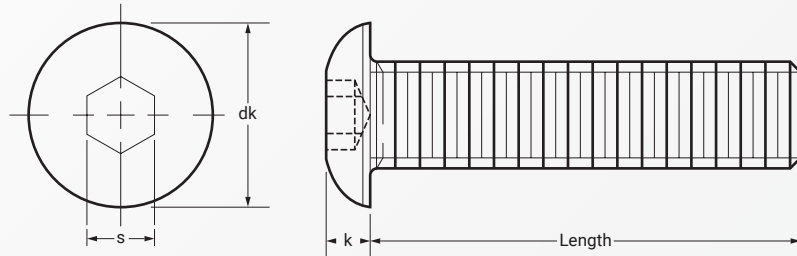

Dimension	threads per inch UNRC	dk	k	s	Length
#1	64	.139	.039	.050	from 1/4"
#2	56	.164	.046	.050	from 1/16"
#3	48	.188	.052	.0625	from 1/8"
#4	40	.213	.059	.0625	from 1/8"
#5	40	.238	.066	.0781	from 3/16"
#6	32	.262	.073	.0781	from 1/8"
#8	32	.312	.087	.0937	from 1/8"
#10	24	.361	.101	.1250	from 3/16"
1/4	20	.437	.132	.1562	from 3/16"
5/16	18	.547	.166	.1875	from 1/4"
3/8	16	.656	.199	.2187	from 1/4"
1/2	13	.875	.265	.3125	from 1/2"
5/8	11	1.000	.331	.3750	from 3/4"

Above datas are for reference only

Note:

B140 denotes Stainless Steel 18-8 plain with Rockwell B55~ hardness in UNC series

Part number built example:

e.g. (1) Diameter #6-32 X 1/2" in stainless steel 18-8

» B140 #6X1/2

e.g. (2) Diameter 1/4-20 X 1" in stainless steel 18-8

» B140 1/4X1



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730