




# HEXAGON HEAD FLANGE SCREW SERRATED INCH (UNC & UNF THREAD) CARBON STEEL GRADE 5

ZINC PLATE | BLACK ULTRA COATED\*

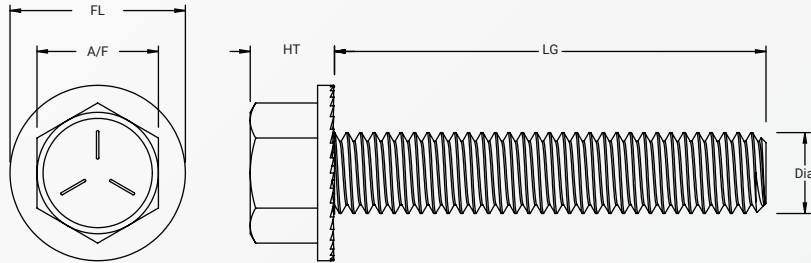

SF-D095 Series (UNC)  
SF-D096 Series (UNF)

IFI 111  
SAE J429

CARBON STEEL GRADE 5

ZINC PLATE

Other Finish Options:  
BLACK ULTRA COATED

Dimension (UNC & UNF)	Head Width (A/F)	Head Height (HT)	Flange Dia. (FL)	Length (LG)	Thread
<b>FULL THREAD OPTION</b>					
6-32	1/4"	5/32"	23/64"	from 1/4"	Full
8-32	1/4"	3/16"	3/8"	from 1/4"	Full
10-24	5/16"	7/32"	29/64"	from 3/8"	Full
10-32	5/16"	7/32"	29/64"	from 3/8"	Full
1/4"-20	3/8"	9/32"	9/16"	from 3/8"	Full
1/4"-28	3/8"	9/32"	9/16"	from 1/2"	Full
5/16"-18	1/2"	21/64"	11/16"	from 1/2"	Full
5/16"-24	1/2"	21/64"	11/16"	from 1/2"	Full
3/8"-16	9/16"	25/64"	13/16"	from 1/2"	Full
3/8"-24	9/16"	25/64"	13/16"	from 3/4"	Full
7/16"-14	5/8"	15/32"	15/16"	from 3/4"	Full
1/2"-13	3/4"	33/64"	1 5/64"	from 3/4"	Full
5/8"-11	15/16"	5/8"	1 21/64"	from 1-1/2"	Full



RoHS Directive Compliance



Above datas are for reference only

Note:

D095 denotes unc hex flange scr serrated in steel zinc plate grade 5 rated

D096 denotes unf hex flange scr serrated in steel zinc plate grade 5 rated

Black ultra coated bolts, can withstand 1,000hrs salt spray test

\*Optional finish, add "-BC" black ultra coat on part number. Dia. starts 1/4" unc

Part number built example:

e.g. (1) Diameter 3/8-16 X 3/4" in steel gr5 zinc plate >> SF-D095 3/8X3/4

e.g. (2) Diameter 3/8-16 X 3/4" in steel gr5 black ultra coat >> SF-D095 3/8X3/4-BC

e.g. (3) Diameter 3/8-24 X 3/4" in steel gr5 zinc plate unf >> SF-D096 3/8X3/4



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730