



SF-D110 Series (UNF)
SF-D112 Series (UNEF)

ASME B18.2.1



STAINLESS STEEL 18-8

PLAIN

Other Finish Options:
BLACK OXIDE




RoHS Directive Compliance



HEXAGON HEAD SCREW INCH (UNF & UNEF THREAD) STAINLESS STEEL 18-8

PLAIN | BLACK OXIDE*

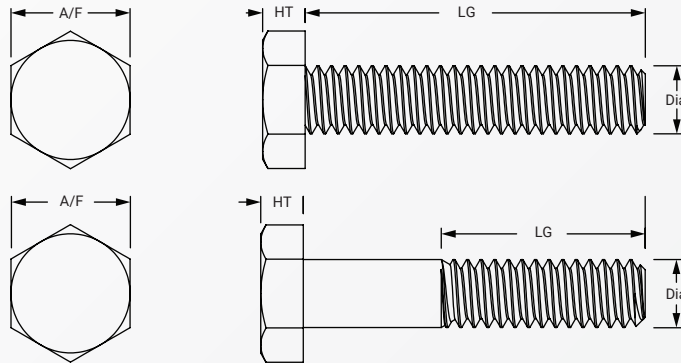

Dimension (UNF & UNEF)	Head Width (A/F)	Head Height (HT)	Length (LG)	Thread	Thread Spacing
FULL THREAD OPTION					
10-32	5/16"	1/8"	from 1/4"	Full	Fine
1/4"-28	7/16"	5/32"	from 3/8"	Full	Fine
5/16"-24	1/2"	13/64"	from 1/2"	Full	Fine
3/8"-24	9/16"	15/64"	from 1/2"	Full	Fine
7/16"-20	5/8"	9/32"	from 3/4"	Full	Fine
1/2"-20	3/4"	5/16"	from 1/2"	Full	Fine
9/16"-18	13/16"	23/64"	from 1.0"	Full	Fine
5/8"-18	15/16"	25/64"	from 3/4"	Full	Fine
3/4"-16	1 1/8"	15/32"	from 1-1/4"	Full	Fine
7/8"-14	1 5/16"	35/64"	from 1-1/2"	Full	Fine
1"-14	1 1/2"	39/64"	from 1-1/2"	Full	Extra Fine

Please turn over for partial thread options ->>

Above datas are for reference only

Note:

D110 denotes unf hex screw in stainless steel 18-8

D112 denotes unef hex screw in stainless steel 18-8

ASME B18.2.1 rating, applicable from diameter 1/4" onwards

Full & partial thread as above both tables described

*For optional finish, add "-BO" for black oxide on part number

Part number built example:

e.g. (1) Diameter 1/2-20 X 1" in stainless steel 18-8

e.g. (2) Diameter 1/2-20 X 1" in stainless steel 18-8 black oxide

e.g. (3) Diameter 1-14 X 3" in stainless steel 18-8 unef

>>SF-D110 1/2X1

>>SF-D110 1/2X1-BO

>>SF-D112 1X3.0



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730

page 1/2



SF-D110 Series (UNF)
SF-D112 Series (UNEF)

ASME B18.2.1



STAINLESS STEEL 18-8

PLAIN

Other Finish Options:
BLACK OXIDE




RoHS Directive Compliance



HEXAGON HEAD SCREW INCH (UNF & UNEF THREAD) STAINLESS STEEL 18-8

PLAIN | BLACK OXIDE*

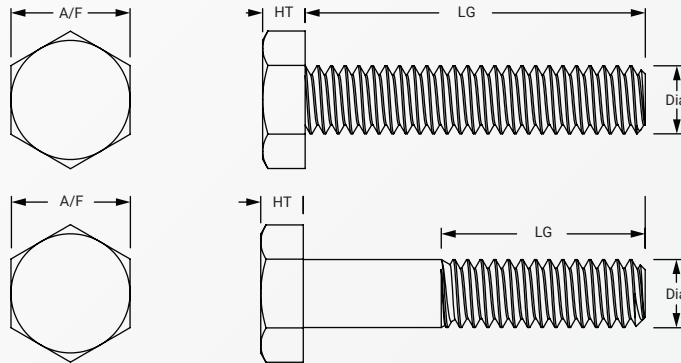

Dimension (UNF & UNEF)	Head Width (A/F)	Head Height (HT)	Length (LG)	Thread	Thread Spacing
------------------------	------------------	------------------	-------------	--------	----------------

PARTIAL THREAD OPTION

10-32	5/16"	1/8"	from 2-1/2"	min 1 1/2"	Fine
1/4"-28	7/16"	5/32"	from 1-1/4"	min 3/4"	Fine
5/16"-24	1/2"	13/64"	from 1-1/4"	min 7/8"	Fine
3/8"-24	9/16"	15/64"	from 1-1/2"	min 1.0"	Fine
7/16"-20	5/8"	9/32"	from 1-3/4"	min 1 1/8"	Fine
1/2"-20	3/4"	5/16"	from 2.0"	min 1 1/4"	Fine
9/16"-18	13/16"	23/64"	from 2-1/2"	min 1 3/8"	Fine
5/8"-18	15/16"	25/64"	from 2-1/2"	min 1 1/2"	Fine
3/4"-16	1 1/8"	15/32"	from 2-3/4"	min 1 3/4"	Fine
7/8"-14	1 5/16"	35/64"	from 3.0"	min 2.0"	Fine
1"-14	1 1/2"	39/64"	from 3.0"	min 2 1/4"	Extra Fine

Above datas are for reference only

Note:

D110 denotes unf hex screw in stainless steel 18-8

D112 denotes unef hex screw in stainless steel 18-8

ASME B18.2.1 rating, applicable from diameter 1/4" onwards

Full & partial thread as above both tables described

*For optional finish, add "-BO" for black oxide on part number

Part number built example:

e.g. (1) Diameter 1/2-20 X 1" in stainless steel 18-8

e.g. (2) Diameter 1/2-20 X 1" in stainless steel 18-8 black oxide

e.g. (3) Diameter 1-14 X 3" in stainless steel 18-8 unef

»SF-D110 1/2X1

»SF-D110 1/2X1-BO

»SF-D112 1X3.0



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730

page 2/2