



SF-D115 Series

ASME B18.2.1



STAINLESS STEEL 316

PLAIN

Other Finish Options:
BLACK OXIDE




RoHS Directive Compliance



HEXAGON HEAD SCREW INCH (**UNF** THREAD) STAINLESS STEEL 316

PLAIN | BLACK OXIDE*

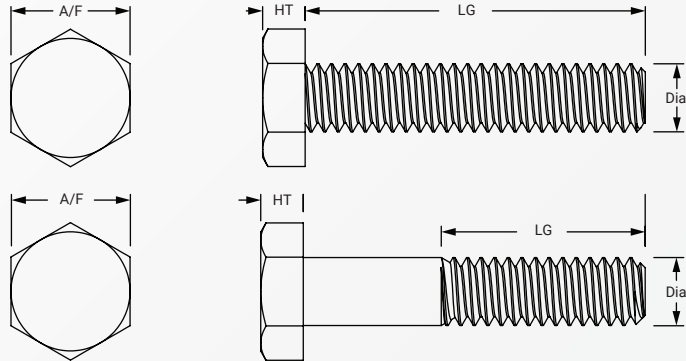

Dimension (UNF)	Head Width (A/F)	Head Height (HT)	Length (LG)	Thread
FULL THREAD OPTION				
10-32	5/16"	1/8"	from 3/8"	Full
1/4"-28	7/16"	5/32"	from 1/2"	Full
5/16"-24	1/2"	13/64"	from 1/2"	Full
3/8"-24	9/16"	15/64"	from 1/2"	Full
7/16"-20	5/8"	9/32"	from 1.0"	Full
1/2"-20	3/4"	5/16"	from 3/4"	Full
5/8"-18	15/16"	25/64"	from 1.0"	Full
3/4"-16	1 1/8"	15/32"	from 1-1/2"	Full
PARTIAL THREAD OPTION				
1/4"-28	7/16"	5/32"	from 1-1/4"	min 3/4"
5/16"-24	1/2"	13/64"	from 1-1/2"	min 7/8"
3/8"-24	9/16"	15/64"	from 1-1/2"	min 1.0"
7/16"-20	5/8"	9/32"	from 1-3/4"	min 1-1/8"
1/2"-20	3/4"	5/16"	from 2.0"	min 1-1/4"
5/8"-18	15/16"	25/64"	from 2-1/2"	min 1-1/2"

Above datas are for reference only

Note:

D115 denotes unf hex screw in stainless steel 316
ASME B18.2.1 rating, applicable from diameter 1/4" onwards
Full & partial thread as above both tables described
*For optional finish, add "-BO" for black oxide on part number

Part number built example:

e.g. (1) Diameter 1/2-20 X 1" in stainless steel 316

» SF-D115 1/2X1

e.g. (2) Diameter 1/2-20 X 1" in stainless steel 316 black oxide

» SF-D115 1/2X1-BO



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730

page 1/2