



SF-D202 Series (UNC)
SF-D203 Series (UNF)

ANSI~(Ref.)

STAINLESS STEEL 18-8

PLAIN




RoHS Directive Compliance



HEXAGON HEAD FLANGE SCREW SERRATED INCH (UNC & UNF THREAD) STAINLESS STEEL 18-8

PLAIN

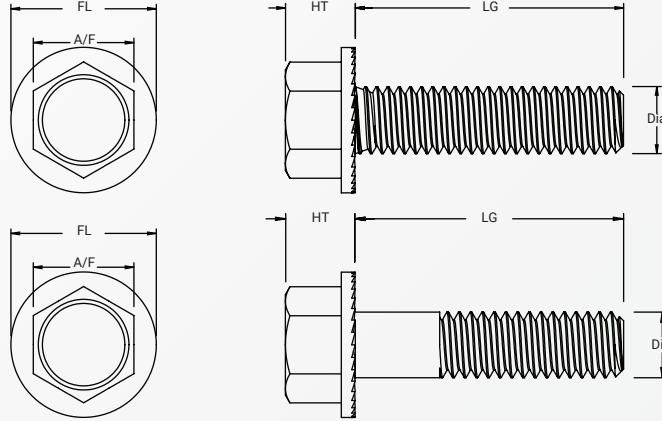

Dimension (UNC & UNF)	Head Width (A/F)	Head Height (HT)	Flange Dia. (FL)	Length (LG)	Thread
FULL THREAD OPTION					
6-32	1/4"	3/32"	5/16"	from 1/4"	Full
8-32	1/4"	7/64"	11/32"	from 3/8"	Full
10-24	5/16"	3/16"	7/16"	from 3/8"	Full
10-32	5/16"	3/16"	7/16"	from 1/4"	Full
12-24	5/16"	7/32"	1/2"	from 1/2"	Full
1/4"-20	3/8"	9/32"	9/16"	from 3/8"	Full
1/4"-28	3/8"	9/32"	9/16"	from 1/2"	Full
5/16"-18	1/2"	21/64"	11/16"	from 3/8"	Full
3/8"-16	9/16"	25/64"	13/16"	from 1/2"	Full
1/2"-13	3/4"	33/64"	1 5/64"	from 3/4"	Full
PARTIAL THREAD OPTION					
3/8"-16	9/16"	25/64"	13/16"	from 2.0"	min 1.0"

Above datas are for reference only

Note:
D202 denotes unc hex flange scr serrated in stainless steel 18-8
D203 denotes unf hex flange scr serrated in stainless steel 18-8
Full & partial thread as above both tables described

Part number built example:

e.g. (1) Diameter 1/4-20 X 1" in stainless steel 18-8 >> SF-D202 1/4X1
e.g. (2) Diameter 1/4-28 X 1" in stainless steel 18-8 unf >> SF-D203 1/4X1



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730

page 1/2