



SF-D204 Series (UNC)


ANSI~(Ref.)

STAINLESS STEEL 316

PLAIN




RoHS Directive Compliance



HEXAGON HEAD FLANGE SCREW SERRATED INCH (UNC THREAD) STAINLESS STEEL 316

PLAIN

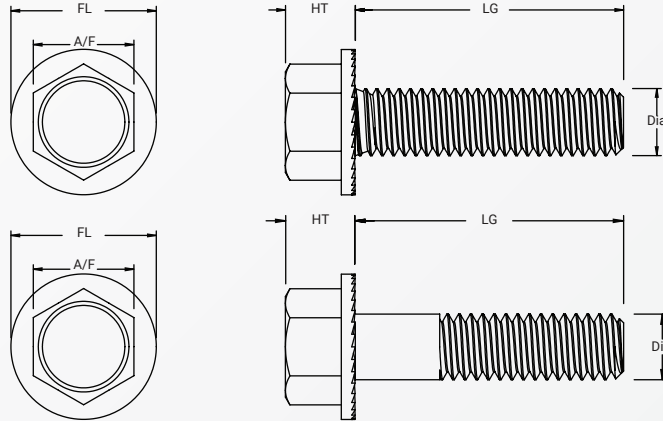

Dimension (UNC)	Head Width (A/F)	Head Height (HT)	Flange Dia. (FL)	Length (LG)	Thread
FULL THREAD OPTION					
1/4"-20	3/8"	9/32"	9/16"	from 1/2"	Full
5/16"-18	1/2"	21/64"	11/16"	from 3/4"	Full
3/8"-16	9/16"	25/64"	13/16"	from 3/4"	Full
PARTIAL THREAD OPTION					
1/4"-20	3/8"	9/32"	9/16"	from 1-1/4"	min 3/4"
5/16"-18	1/2"	21/64"	11/16"	from 1-1/2"	min 7/8"
3/8"-16	9/16"	25/64"	13/16"	from 1-1/2"	min 1.0"

Above datas are for reference only

Note:

D204 denotes unc hex flange scr serrated in stainless steel 316
Full & partial thread as above both tables described

Part number built example:

e.g. (1) Diameter 5/16-18 X 1-1/4" in stainless steel 316 >> SF-D204 5/16X1-1/4



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730