



SF-F076 Series



CARBON STEEL GRADE 8

ZINC YELLOW

Other Finish Options:
BLACK OXIDE





RoHS Directive Compliance



HEXAGON LOCK NUT WITH NYLON INSERT INCH (UNC THREAD) CARBON STEEL GRADE 8

ZINC YELLOW | BLACK OXIDE*

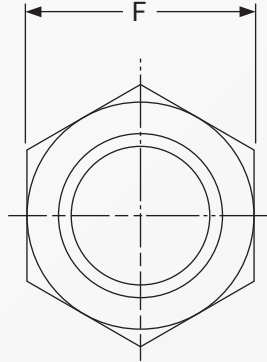

Dimension	Width (F)	Height (H)
1/4"-20	7/16"	5/16"
5/16"-18	1/2"	11/32"
3/8"-16	9/16"	29/64"
7/16"-14	5/8"	29/64"
1/2"-13	3/4"	19/32"
9/16"-12	7/8"	41/64"
5/8"-11	15/16"	3/4"
3/4"-10	1 1/16"	7/8"
7/8"-9	1 1/4"	63/64"
1"-8	1 7/16"	1 3/64"
1"-8	1 5/8"	1 9/32"
1 1/8"-7	1 5/8"	1 11/64"

Dimension	Width (F)	Height (H)
1 1/4"-7	1 13/16"	1 25/64"
1 1/4"-7	2 1/64"	1 41/64"
1 1/4"-8	2 1/64"	1 41/64"
1 3/8"-8	2 13/16"	1 51/64"
1 1/2"-6	2 13/64"	1 39/64"
1 1/2"-6	2 25/64"	1 59/64"
1 1/2"-8	2 25/64"	1 59/64"
1 3/4"-5	2 49/64"	2 5/16"
1 3/4"-8	2 49/64"	2 5/16"
2"-4 1/2	3 9/64"	2 13/32"
2"-8	3 9/64"	2 13/32"
2 1/4"-8	3 33/64"	2 13/16"

Above datas are for reference only

Note:

F076 denotes unc hex lock nuts in steel zinc yellow grade 8 rated

For use at temperature max. 100 degree (220 Fahrenheit)

*For optional finish, add "-BO" for black oxide on part number

Part number built example:

e.g. (1) Diameter 3/4-10 in steel gr8 zinc yellow

» SF-F076 3/4

e.g. (2) Diameter 3/4-10 in steel gr8 black oxide

» SF-F076 3/4-BO



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730