



SF-F078 Series



CARBON STEEL GRADE 8

ZINC YELLOW

Other Finish Options:  
BLACK OXIDE





RoHS Directive Compliance



## HEXAGON LOCK NUT WITH NYLON INSERT INCH (UNF THREAD) CARBON STEEL GRADE 8

ZINC YELLOW | BLACK OXIDE\*

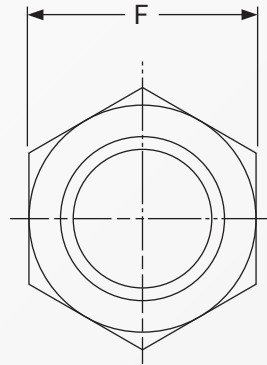

Dimension	Width (F)	Height (H)
1/4"-28	7/16"	5/16"
5/16"-24	1/2"	11/32"
3/8"-24	9/16"	29/64"
7/16"-20	5/8"	29/64"
1/2"-20	3/4"	19/32"
9/16"-18	7/8"	41/64"
5/8"-18	15/16"	3/4"
3/4"-16	1 1/16"	7/8"
7/8"-14	1 1/4"	63/64"
1"-12	1 7/16"	1 3/64"
1 1/8"-12	1 5/8"	1 11/64"
1 1/4"-12	1 13/16"	1 25/64"
1 1/2"-12	2 13/64"	1 39/64"
1 3/4"-12	2 49/64"	2 5/16"

Above datas are for reference only

Note:

F078 denotes unf hex lock nuts in steel zinc yellow grade 8 rated

For use at temperature max. 100 degree (220 Fahrenheit)

\*For optional finish, add "-BO" for black oxide on part number

Part number built example:

e.g. (1) Diameter 3/8-24 in steel gr8 zinc yellow

» SF-F078 3/8

e.g. (2) Diameter 3/8-24 in steel gr8 black oxide

» SF-F078 3/8-BO



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730