



SF-F110 Series
SF-F115 Series

ASME B18.2.2~


STAINLESS STEEL
18-8 | 316

PLAIN

Other Finish Options:
BLACK OXIDE
PTFE COATED





RoHS Directive Compliance



HEXAGON NUT INCH (UNF THREAD) STAINLESS STEEL 18-8 | 316

PLAIN | BLACK OXIDE* | PTFE COATED*

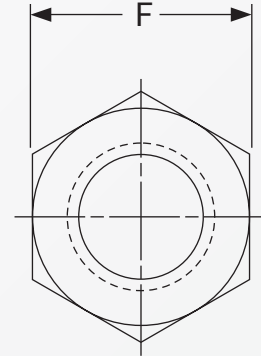

Dimension	Width (F)	Height (H)	Dimension	Width (F)	Height (H)
0-80	5/32"	3/64"	3/8"-24	9/16"	21/64"
1-72	5/32"	3/64"	7/16"-20	11/16"	3/8"
2-64	3/16"	1/16"	1/2"-20	3/4"	7/16"
3-56	3/16"	1/16"	9/16"-18	7/8"	31/64"
4-48	1/4"	3/32"	5/8"-18	15/16"	35/64"
5-44	5/16"	7/64"	3/4"-16	1 1/8"	41/64"
6-40	5/16"	7/64"	7/8"-14	1 5/16"	3/4"
8-36	11/32"	1/8"	1"-12	1 1/2"	55/64"
10-32	3/8"	1/8"	1 1/8"-12	1 11/16"	31/32"
12-28	7/16"	5/32"	1 1/4"-12	1 7/8"	1 1/16"
1/4"-28	7/16"	7/32"	1 1/2"-12	2 1/4"	1 9/32"
5/16"-24	1/2"	17/64"			

Above datas are for reference only

Note:

F110 denotes unf hex nuts in stainless steel 18-8

F115 denotes unf hex nuts in stainless steel 316

Black oxide finish, have a dark surface color

PTFE coated, are chemical resistant & have a slippery surface to resist sticking during assembly

*For optional finish, add "-BO" for black oxide | "-PTFE" for ptfе coating on part number

Part number built example:

e.g. (1) Diameter 1/4-28 in stainless steel 18-8

» SF-F110 1/4

e.g. (2) Diameter 1/4-28 in stainless steel 316

» SF-F115 1/4

e.g. (3) Diameter #10-32 in stainless steel 18-8 black oxide

» SF-F110 #10-BO

e.g. (4) Diameter #10-32 in stainless steel 18-8 ptfе coated

» SF-F110 #10-PTFE



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730