



SF-F140 Series



STAINLESS STEEL 18-8

PLAIN

Other Finish Options:
BLACK OXIDE





RoHS Directive Compliance



HEXAGON LOCK NUT WITH NYLON INSERT INCH (UNC THREAD) STAINLESS STEEL 18-8

PLAIN | BLACK OXIDE*

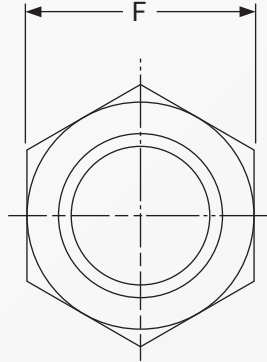

Dimension	Width (F)	Height (H)
#2-56	1/4"	9/64"
#3-48	1/4"	9/64"
#4-40	1/4"	9/64"
#5-40	1/4"	9/64"
#6-32	5/16"	11/64"
#8-32	11/32"	15/64"
#10-24	3/8"	15/64"
#12-24	7/16"	5/16"
1/4"-20	7/16"	5/16"
5/16"-18	1/2"	11/32"
3/8"-16	9/16"	29/64"

Dimension	Width (F)	Height (H)
7/16"-14	5/8"	29/64"
1/2"-13	3/4"	19/32"
9/16"-12	7/8"	41/64"
5/8"-11	15/16"	3/4"
3/4"-10	1 1/16"	7/8"
7/8"-9	1 1/4"	63/64"
1"-8	1 7/16"	1 3/64"
1 1/8"-7	1 5/8"	1 11/64"
1 1/4"-7	1 13/16"	1 25/64"
1 1/2"-6	2 13/64"	1 39/64"

Above datas are for reference only

Note:

F140 denotes unc hex lock nuts in stainless steel 18-8

For use at temperature max. 100 degree (220 Fahrenheit)

*For optional finish, add "-BO" for black oxide on part number

Part number built example:

e.g. (1) Diameter 5/16-18 in stainless steel 18-8

» SF-F140 5/16

e.g. (2) Diameter 5/16-18 in stainless steel 18-8

» SF-F140 5/16-BO



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730