



SF-F142 Series



STAINLESS STEEL 18-8

PLAIN

Other Finish Options:
BLACK OXIDE





RoHS Directive Compliance



HEXAGON LOCK NUT WITH NYLON INSERT INCH (UNF THREAD) STAINLESS STEEL 18-8

PLAIN | BLACK OXIDE*

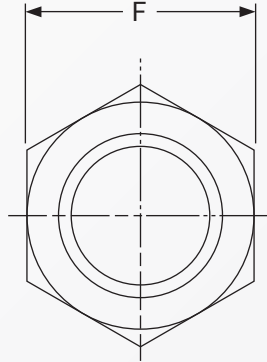

Dimension	Width (F)	Height (H)
#6-40	5/16"	11/64"
#8-36	11/32"	15/64"
#10-32	3/8"	15/64"
#12-28	7/16"	5/16"
1/4"-28	7/16"	5/16"
5/16"-24	1/2"	11/32"
3/8"-24	9/16"	29/64"
7/16"-20	5/8"	29/64"
1/2"-20	3/4"	19/32"
9/16"-18	7/8"	41/64"
5/8"-18	15/16"	3/4"
3/4"-16	1 1/16"	7/8"
7/8"-14	1 1/4"	63/64"
1"-12	1 7/16"	1 3/64"

Above datas are for reference only

Note:

F142 denotes unf hex lock nuts in stainless steel 18-8

For use at temperature max. 100 degree (220 Fahrenheit)

*For optional finish, add "-BO" for black oxide on part number

Part number built example:

e.g. (1) Diameter 3/8-24 in stainless steel 18-8

» SF-F142 3/8

e.g. (2) Diameter 3/8-24 in stainless steel 18-8

» SF-F142 3/8-BO



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730