



**SF-C080 SERIES
SF-C080 XXX-
ZFL SERIES**


STEEL CLASS 100

BLACK

ZINC FLAKES 480HR




RoHS Directive Compliance



HEXAGON FLANGE SCREW CL100 (RIPP)

BLACK & ZINC FLAKES 480HR

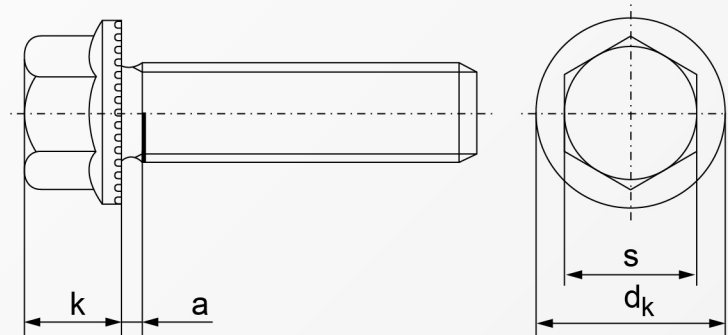

| Dimensions | $a_{max.}$ | d_k | k | s | qty.ribs | Length |
|------------|------------|-------|-----|----|----------|-----------------|
| M 5 | 1.6 | 11.2 | 4.3 | 8 | 28 | from 10mm |
| M 6 | 2 | 14.2 | 5.5 | 10 | 36 | from 12mm |
| M 8 | 2.5 | 18.2 | 7 | 13 | 48 | from 12mm |
| M 10 | 3 | 21 | 8.5 | 15 | 48 | from 16mm |
| M 12 | 3.5 | 24 | 10 | 17 | 60 | from 20mm |
| M 14 | 4 | 27.5 | 12 | 19 | 60 | special request |
| M 16 | 4 | 31 | 14 | 22 | 72 | from 25mm |

Above datas are for reference only

Note:

C080 denotes Class 10 steel black & C080 XXX-ZFL denotes with zinc flakes coating

Part number built example:

e.g. (1) Diameter M10 X 45 in steel black material

»SF-C080 10X45

e.g. (2) Diameter M8 X 25 in steel material with zinc flakes coating

»SF-C080 8X25-ZFL



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730