




SF-C128 SERIES

ISO 4017
DIN 933~

STAINLESS
STEEL


A4-80

PASSIVATED



HEXAGON HEAD SCREW (FULL THREAD)

STAINLESS STEEL A4-80

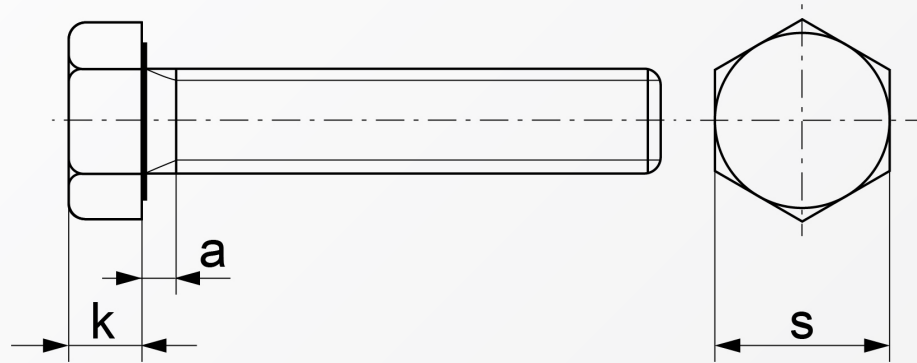

Dimensions	S _{ISO/DIN}	k	a _{max.}	Length
M 3	5.5	2	1.5	from 6mm
M 4	7	2.8	2.1	from 6mm
M 5	8	3.5	2.4	from 6mm
M 6	10	4	3	from 6mm
M 8	13	5.3	3.75	from 8mm
M 10	16/17	6.4	4.5	from 10mm
M 12	18/19	7.5	5.25	from 16mm
M 14	21/22	8.8	6	from 20mm
M 16	24	10	6	from 20mm
M 18	27	11.5	7.5	from 30mm
M 20	30	12.5	7.5	from 30mm
M 22	34/32	14	7.5	from 30mm
M 24	36	15	9	from 40mm
M 27	41	17	9	from 50mm
M 30	46	18.7	10.5	from 60mm
M 33	50	21	10.5	from 70mm
M 36	55	22.5	12	from 80mm
M 39	60	25	12	special request
M 42	65	26	13.5	special request
M 45	70	28	13.5	special request
M 48	75	30	15	special request
M 52	80	33	15	special request
M 56	85	35	16.5	special request
M 64	95	40	18	special request

Above datas are for reference only

Note:
C128 denotes stainless steel A4-80 grade

Part number built example:

e.g. (1) Diameter 10X40 thread in A4-80 grade >>SF-C128 10X40



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730