



SF-G050 SERIES
SF-G051 SERIES

ISO 2009
DIN 963~


STEEL

4.8 | 8.8

ZINC PLATE




RoHS Directive Compliance



SLOTTED COUNTERSUNK HEAD SCREW

STEEL GRADE 4.8 & 8.8 | ZINC

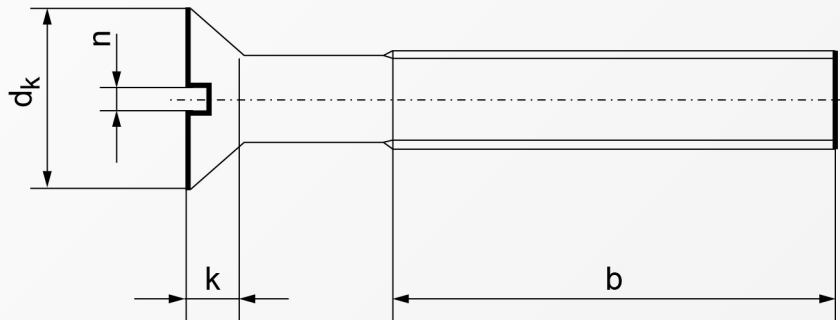

Dimensions	d_k ISO/DIN	k ISO/DIN	b^*	n	Length
M 1	1.9	0.6	1)	0.25	from 2mm
M 1.2	2.3	0.72	1)	0.3	from 2mm
M 1.4	2.6	0.84	1)	0.3	from 2mm
M 1.6	3	1/0.96	15	0.4	from 3mm
M 2	3.8	1.2	16	0.5	from 3mm
M 2.5	4.7	1.5	18	0.6	from 4mm
M 3	5.5/5.6	1.65	19	0.8	from 4mm
M 3.5	7.3/ 6.5	2.35/1.93	38	1	special request
M 4	8.4/7.5	2.7/2.2	22	1.2	from 5mm
M 5	9.3/9.2	2.7/2.5	25	1.2	from 6mm
M 6	11.3/11	3.3/3	28	1.6	from 8mm
M 8	15.8/14.5	4.65/4	34	2	from 10mm
M 10	18.3/18	5	40	2.5	from 16mm
M 12	22	6	46	3	from 16mm
M 16	29	8	58	4	from 25mm
M 20	36	10	70	5	special request

Above datas are for reference only

b^* denotes min lengths

1) denotes only with thread up to near the head

Note:

G050 denotes steel 4.8 zinc & G051 denotes steel 8.8 zinc

Part number built example:

e.g. (1) Diameter 3X10 thread in steel 4.8 zinc

» SF-G050 3X10

e.g. (2) Diameter 5X16 thread in steel 8.8 zinc

» SF-G051 5X16



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730