



SF-I022 SERIES  
SF-I023 SERIES

DIN 128A | DIN 128B


TYPE A Curved  
TYPE B Waved

SPRING STEEL

MECHANICAL ZINC




RoHS Directive Compliance




# CURVED SPRING LOCK WASHER (TYPE A Curved | TYPE B Waved)

SPRING STEEL ZINC (MECH.)

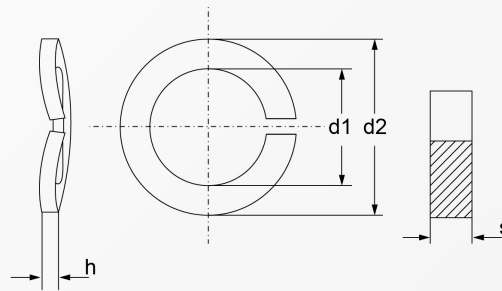

type A = curved

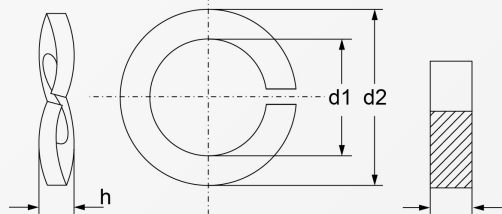

type B = waved

Dimension	d <sub>1</sub>	d <sub>2</sub>	s	h
2.2*	2.4	4.8	0.6	1
2.5	2.6	5.1	0.6	1.1
3	3.1	6.2	0.7	1.3
4	4.1	7.6	0.8	1.4
5	5.1	9.2	1	1.7
6	6.1	11.8	1.3	2.2
8	8.1	14.8	1.6	2.75
10	10.2	18.1	1.8	3.15
12	12.2	21.1	2.1	3.65
14	14.2	24.1	2.4	4.3
16	16.2	27.4	2.8	5.1
18	18.2	29.4	2.8	5.1
20	20.2	33.6	3.2	5.9
22	22.5	35.9	3.2	5.9
24	24.5	40	4	7.5
27	27.5	43	4	7.5
30	30.5	30.5	6	10.5
36	35.5	58.2	3	11.3

Above datas are for reference only  
\*not standardise, reference values

Note:  
I022 denotes type A curved  
I023 denotes type B waved

Part number built example:  
e.g. (1) Diameter M10 in type A, curved >>SF-I022 M10  
e.g. (2) Diameter M8 in type B, waved >>SF-I023 M8



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730