



SF-G160 SERIES
SF-G161 SERIES

ISO 2009
DIN 963~


STAINLESS
STEEL

A2 | A4

PASSIVATED




RoHS Directive Compliance



SLOTTED COUNTERSUNK HEAD SCREW

STAINLESS STEEL A2 & A4

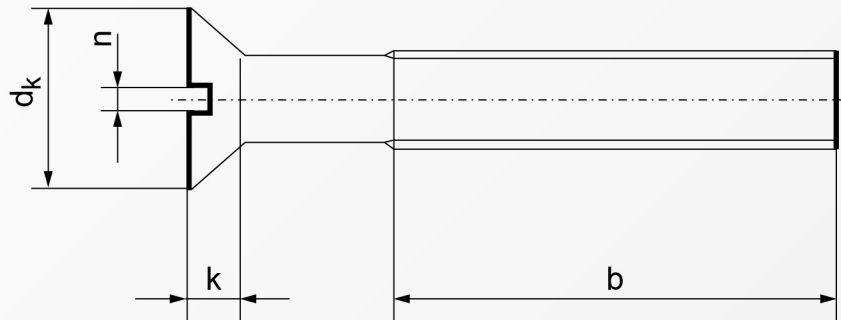

Dimensions	d_k ISO/DIN	k ISO/DIN	b^*	n	Length
M 1	1.9	0.6	1)	0.25	from 2mm
M 1.2	2.3	0.72	1)	0.3	from 2mm
M 1.4	2.6	0.84	1)	0.3	from 2mm
M 1.6	3	1/0.96	15	0.4	from 3mm
M 2	3.8	1.2	16	0.5	from 3mm
M 2.5	4.7	1.5	18	0.6	from 4mm
M 3	5.5/5.6	1.65	19	0.8	from 4mm
M 3.5	7.3/ 6.5	2.35/1.93	38	1	special request
M 4	8.4/7.5	2.7/2.2	22	1.2	from 5mm
M 5	9.3/9.2	2.7/2.5	25	1.2	from 6mm
M 6	11.3/11	3.3/3	28	1.6	from 8mm
M 8	15.8/14.5	4.65/4	34	2	from 10mm
M 10	18.3/18	5	40	2.5	from 16mm
M 12	22	6	46	3	from 16mm
M 16	29	8	58	4	from 25mm
M 20	36	10	70	5	special request

Above datas are for reference only

b^* denotes min lengths

1) denotes only with thread up to near the head

Note:

G160 denotes Stainless A2 & G161 denotes Stainless A4

Part number built example:

e.g. (1) Diameter M3 X 12 in stainless A2 material >> SF-G160 3X12

e.g. (2) Diameter M5 X 25 in stainless A4 material >> SF-G161 5X25



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730