



SF-G020 SERIES
SF-G021 SERIES

ISO 7046
DIN 965~
(TYPE H & TYPE Z)


STEEL

4.8

ZINC PLATE




RoHS Directive Compliance



COUNTERSUNK HEAD SCREW WITH CROSS RECESS PHILIPS (H) OR POZI (Z)

STEEL GRADE 4.8 ZINC

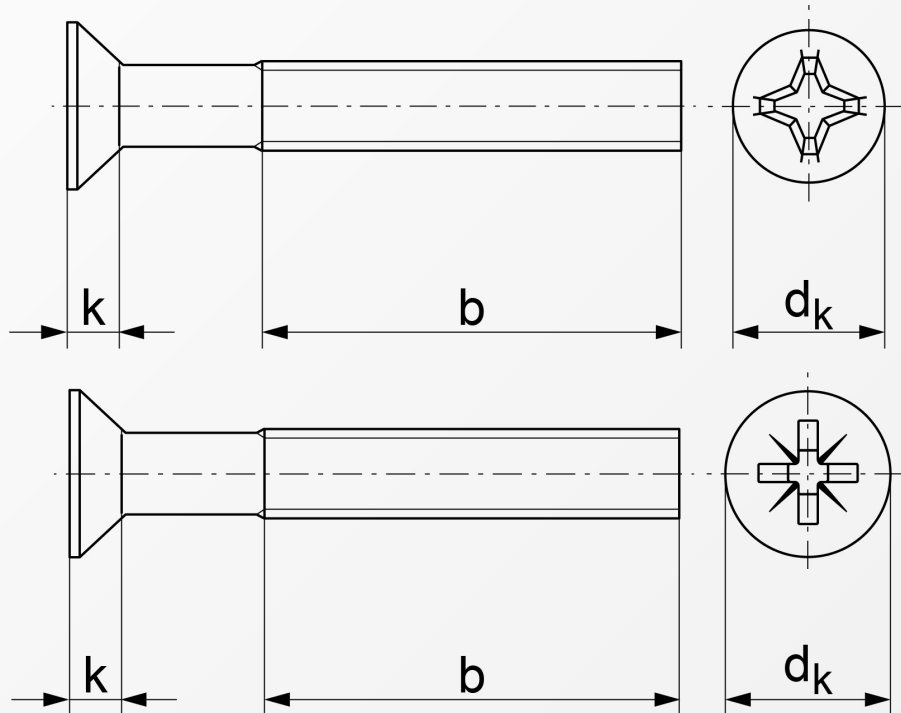

Dimensions	d_k ISO/DIN	k ISO/DIN	b^*	cross recess size	Length
M 1.6	3	1/0.96	15	0	from 3mm
M 2	3.8	1.2	16	1	from 3mm
M 2.5	4.7	1.5	18	1	from 3mm
M 3	5.5/5.6	1.65	19	1	from 4mm
M 4	8.4/7.5	2.7/2.2	22	2	from 5mm
M 5	9.3/9.2	2.7/2.5	25	2	from 6mm
M 6	11.3/11	3.3/3	28	3	from 8mm
M 8	15.8/14.5	4.65/4	34	4	from 10mm
M 10	18.3/18	5	40	4	from 12mm

Above datas are for reference only
*min length

Note:
G020 denotes steel 4.8 zinc Philip drive (H)
G021 denotes steel 4.8 zinc Pozi drive (Z)

Part number built example :

e.g. (1) Diameter 5X16 thread in philip drive >> SF-G020 5X16
e.g. (2) Diameter 4X12 thread in pozi drive >> SF-G021 4X12



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730