




SF-G110
XXX-H SERIES
SF-G115
XXX-H SERIES
SF-G110
XXX-Z SERIES
SF-G115
XXX-Z SERIES

ISO 7046
DIN 965~
(TYPE H & TYPE Z)

STAINLESS
STEEL


A2 | A4

PASSIVATED



COUNTERSUNK HEAD SCREW WITH CROSS RECESS PHILIPS (H) OR POZI (Z)

STAINLESS A2 & A4

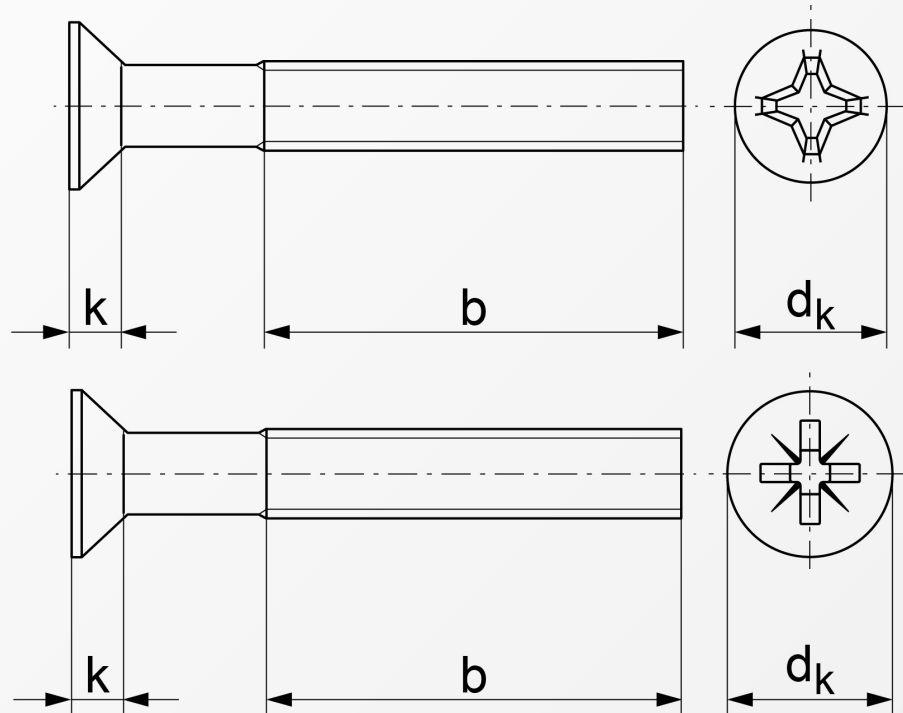

Dimensions	d_k ISO/DIN	k ISO/DIN	b^*	cross recess size	Length
M 1.6	3	1/0.96	15	0	from 3mm
M 2	3.8	1.2	16	1	from 3mm
M 2.5	4.7	1.5	18	1	from 3mm
M 3	5.5/5.6	1.65	19	1	from 4mm
M 4	8.4/7.5	2.7/2.2	22	2	from 5mm
M 5	9.3/9.2	2.7/2.5	25	2	from 6mm
M 6	11.3/11	3.3/3	28	3	from 8mm
M 8	15.8/14.5	4.65/4	34	4	from 10mm
M 10	18.3/18	5	40	4	from 12mm

Above datas are for reference only
*min length

Note:
G110 denotes Stainless A2 & G115 denotes Stainless A4

Part number built example:

- e.g. (1) Diameter M4 X 12 in stainless A2 material, philips drive » SF-G110 4X12-H
- e.g. (2) Diameter M5 X 25 in stainless A4 material, philips drive » SF-G115 5X25-H
- e.g. (3) Diameter M6 X 16 in stainless A2 material, pozi drive » SF-G110 6X16-Z
- e.g. (4) Diameter M6 X 20 in stainless A4 material, pozi drive » SF-G115 6X20-Z



sales@synergixfast.com



www.synergixfast.com



Phone: +65 6 316 2630 | Fax: +65 6 316 2730